

UniCure

Spraybooths

The Ultimate in a Cut-in-Booth!

180 Draft Cut-In Spraybooth Model UE-180°-PB

You Have Parts to Paint! You Have Sheet Metal to Trim-Out!



UniCure's 180-PB solves the problem and cleans the air.

180 degree filter placement assures clean even air flow.

Curtains across the front gives you the option of a closed front or open front spraybooth.

Comes with 2-Parts Hanger tracks with hooks on nylon rollers.

Excellent lighting with (2) 48"-4 tube light fixtures.

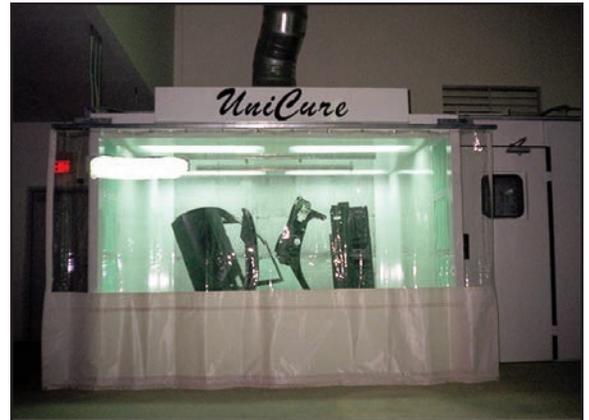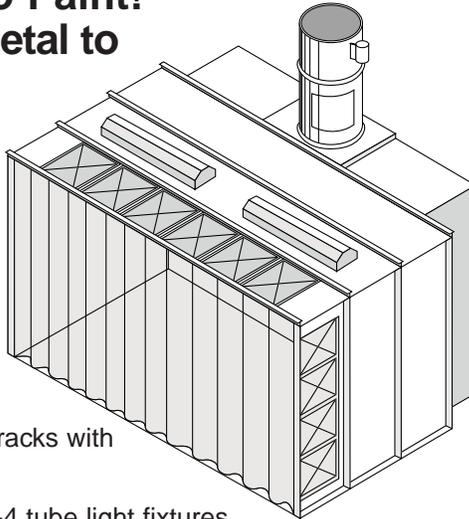


Pictures show optional Powder Coating

This UniCure Spraybooth Comes Complete

- All Necessary Galvanized Steel Construction Panels
- All Necessary Fasteners and Sealing Materials
- (2) 48" 4 Tube Fluorescent Light Fixtures
- (1) Exhaust Fan with 3 PH Motor - 24" or 30" Available
- (2) Extra Sections of Exhaust Duct
- (1) Double Ringed Exhaust Duct with Clean-out door
- (1) Automatic Exhaust Air Ventilator
- All Intake Filters
- All Exhaust Filters

Booth Dimensions

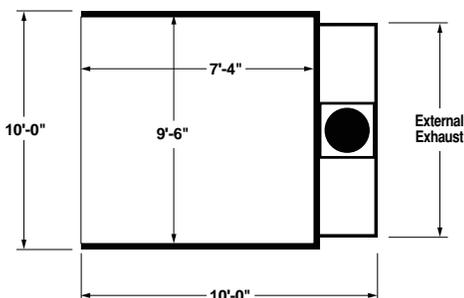

Inside Height: 8'

UniCure
Spraybooths

INTERSTATE MARKETING CORPORATION
104 SPENCE LANE, NASHVILLE, TN 37210

Your Collision Repair Equipment Headquarters

Call Toll Free: 1-800-868-3033 • TN (615) 889-3330
e-mail: unicure@spraybooths.com • www.spraybooths.com

UniCure

180 Draft Cut-In Spraybooth Model UE-180°-PB

- 1) The spraybooth construction and exhaust air flow velocities are designed to meet or exceed OSHA standards.
- 2) This booth is constructed of 18 gauge galvanized sheet steel, with interlocking flange edges that are fastened together with self-tapping speed screws. Panels have exterior flanges to provide a smooth interior surface.
- 3) Standard exhaust system is furnished with a fan and open type motor.
- 4) Exhaust units and motors supplied are based on the booth installed with a maximum of 25' straight exhaust ducting. When additional ducting or elbows are used, a higher output fan and larger motor might be required. If so, consult your factory representative.
- 5) Booths are furnished with one set of 20" x 20" x 1" tacky intake filters and one set of 20" x 20" x 2" spun glass exhaust filters. The filters have a Class II listing by Underwriters Laboratories, and they are Factory Mutual approved.
- 6) A draft gauge is furnished to indicate when the exhaust filters need changing.
- 7) All light fixtures are 48" fluorescent 4 tube, 110/277 volt, 32 watt T8, UL approved, Class I, Division II. T8 light tubes are furnished with the fixtures.
- 8) Booths require electrical connections to the fan and light fixtures, mechanical duct system connections for air discharge to the outside, and hardware for anchoring the booth to the floor. Motor starters and start/stop stations are **not** included as standard equipment, but are available as options.
- 9) Caulking, seals, fasteners, and all necessary hardware for complete mechanical installation are furnished with all units.
- 10) Specifications subject to change without notice.