

UniCure

SPRAYBOOTHS

ZAPPER

DOWNDRAFT SPRAYBOOTH

Double Wall Insulated

- **Solid Built**
- **3" Rockwool Insulated Wall Panels**
- **Excellent Air Flow**
- **Superior Lighting**
- **Powder Coated White**
- **Easy & Economical to Operate**



Model 3006
Downdraft Side Exhaust



Model 3006
Downdraft Side Exhaust

- Digital Read-Out Control Panel
- Variable Frequency Drive
- Direct Fired Spray and Cure System with 1.5 MBTU ETL Listed
- (14) 4-Tube Inside Accessible Light Fixtures with Tubes
- Tri-Fold Product Doors with Large Windows
- Personnel Door with Large Window
- Intake and Exhaust Ducting for 18ft Roof
- All Necessary Filters



Model 3007
Downdraft Pit Model



Model 3007
Downdraft Pit Model
Single Row Shown
Three Row Optional



Control Panel

ETL Approved Models Available!

UniCure
Spraybooths Prep Stations

INTERSTATE MARKETING CORPORATION
104 SPENCE LANE, NASHVILLE, TN 37210


Your Collision and Repair Equipment Headquarters

Call Toll Free: 1-800-868-3033 • TN (615) 889-3330
email: unicure@spraybooths.com • www.spraybooths.com

Zapper Double Wall Insulated Downdraft Spraybooth

UniCure


3006

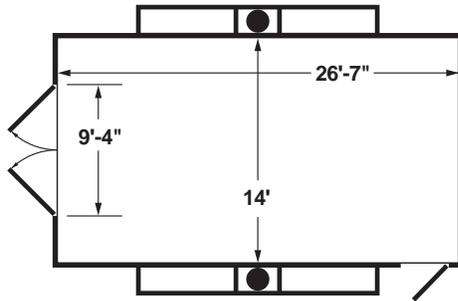

Downdraft
Side Exhaust

UniCure

3007

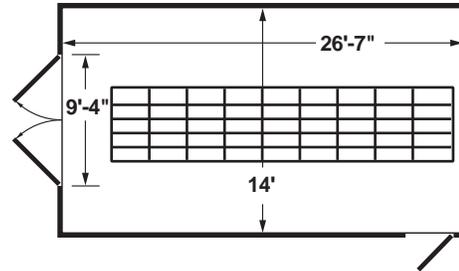

Downdraft
Pit Model

Outside Dimensions

Length 27'-1"
Width 16'-6"
Height 11'-0"

Inside Dimensions

Length 26'-7"
Width 14'-0"
Height 9'-0"

Outside Dimensions

Length 27'-1"
Width 14'-6"
Height 11'-0"

Inside Dimensions

Length 26'-7"
Width 14'-0"
Height 9'-0"

Product Doors

Height 8'-10"
Width 9'-2"

- The spraybooth construction and exhaust air flow velocities are designed to meet or exceed OSHA standards.
- This booth is constructed of 3" rockwool insulated double wall panels and powder coated white inside and out.
- The doors are built with two inch by two inch square tube frames for heavy duty service, and have a lip air seal. One 36" X 84" personnel access door is standard. The door can be located on either side to meet user requirements.
- Booths require electrical connections to the fan and light fixtures, mechanical duct system connections for air discharge to the outside, and hardware for anchoring the booth to the floor.
- Caulking, rubber seals for doors, fasteners, and all necessary hardware for complete mechanical installation are furnished with all units.
- Specifications subject to change without notice.