



UniCure


TRUCK SPRAYBOOTHS

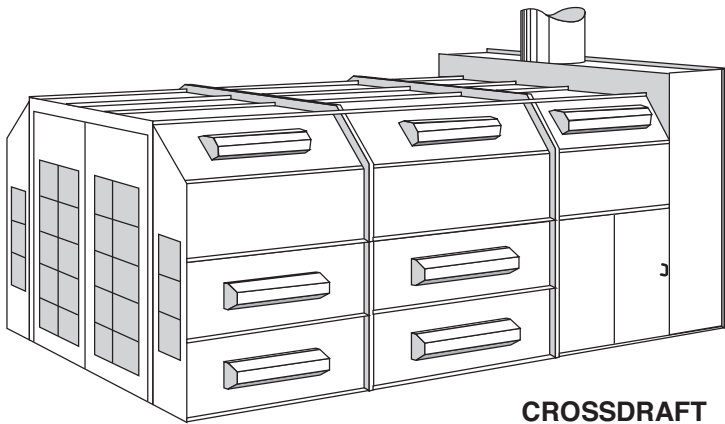

**CROSSDRAFT
UT2498CD**

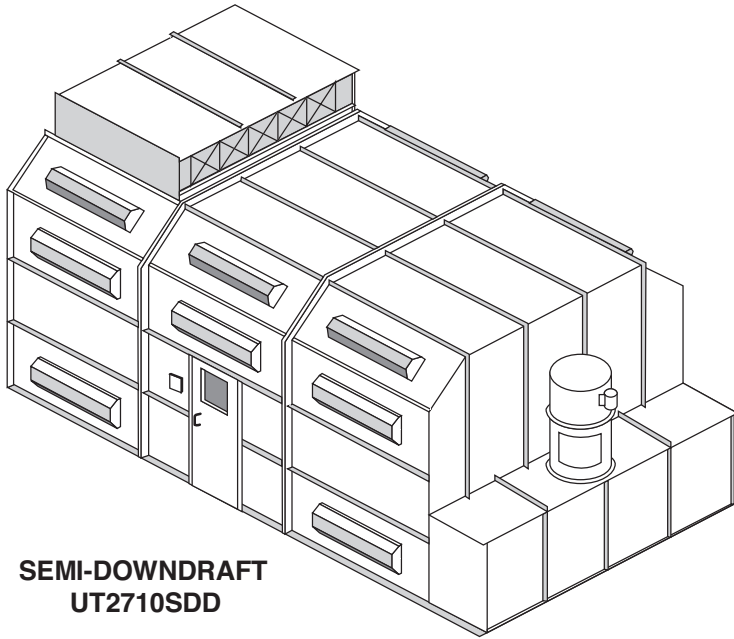

**SEMI-DOWNDRAFT
UT2710SDD**

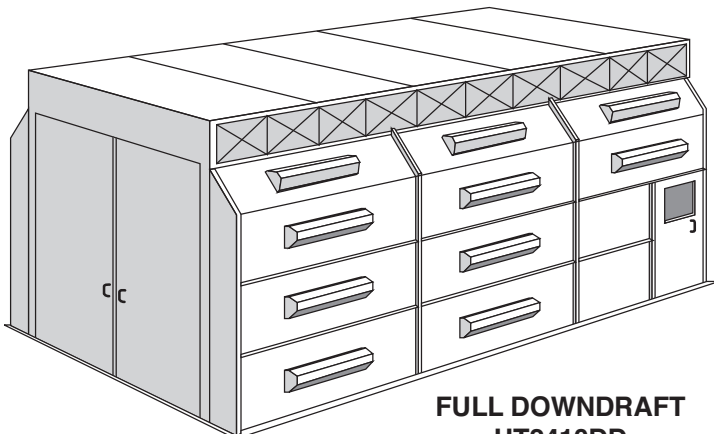

**FULL DOWNDRAFT
UT2410DD**

UniCure Truck Spraybooths are a step ahead, from Crossdraft to Semi-Downdraft to Downdraft.

All Spraybooths are available with Infrared Heat or Heated Air Make-Up with paint cycles or paint and cure cycles.

Manufactured to your needs longer, shorter, wider, or narrower.

Superb quality construction is what you get in these booths that are pre-engineered, pre-fitted and pre-punched holes from 18 gauge galvanized steel.

This all makes UniCure an excellent choice for your painting environment needs.

This UniCure Spraybooth Comes Complete

All Necessary Galvanized Steel Construction Panels

All Necessary Fasteners and Sealing Materials

Solid Product Doors with Hardware

Personnel Door with Window and Hardware

48" 4 Tube Fluorescent Light Fixtures

Exhaust Fan with Motor

2 Extra Sections of Exhaust Duct

1 Exhaust Duct with Cleanout

1 Automatic Exhaust Ventilator

All Intake Filters

All Exhaust Filters

Outside Dimensions

Length 35' and Up

Width 16', 18' or 20'

Height 16', 18' or 20'

Custom Sizes and Designs Available

UniCure
Spraybooths

INTERSTATE MARKETING CORPORATION

104 Spence Lane, Nashville, TN 37210

Your Collision Repair Equipment Headquarters

Call Toll Free: 1-800-868-3033 • TN (615) 889-3330

e-mail: unicure@spraybooths.com • www.spraybooths.com

UniCure

Spraybooths Standard Line

1. The spraybooth construction and exhaust air flow velocities are designed to meet or exceed OSHA standards.
2. This booth is constructed of 18 gauge galvanized sheet steel, sized for easy installation, and precision punched and bolted on six inch centers for maximum rigidity. Panels have exterior flanges to provide a smooth interior surface.
3. Stiffeners are minimum 6" Jr. I-beams for frame strength capable of carrying a booth mounted air make-up unit, without additional support.
4. All product doors are built with two inch square tube frames for heavy duty service and have a 1 1/2" lip air seal.
5. One 36" X 84" personnel access door is standard. The door can be located on either side to meet user requirements. Additional doors will be required as length and width are increased.
6. Standard exhaust systems are furnished with double ring fans and open type motors.
7. Exhaust units and motors supplied are based on the booth installed with a maximum of 25' straight exhaust ducting. When additional ducting or elbows are used, a higher output fan and larger motor might be required. If so, consult your factory representative.
8. Booths are furnished with one set of 20" x 20" x 1" tacky intake filters and one set of 20" x 20" x 2" spun glass exhaust filters. The filters have a Class II listing by Underwriters Laboratories, and they are Factory Mutual approved.
9. A draft gauge is furnished to indicate when the exhaust filters need changing.
10. All light fixtures are 48" fluorescent 4 tube, 110/277 Volt, 32 watt T8, UL approved. Optional light fixtures are available to meet Class I, Division II, and Class I, Division I hazardous areas. T8 Light tubes are furnished with the fixtures.
11. Booths require electrical connections to the fan and light fixtures, mechanical duct system connections for air discharge to the outside, and hardware for anchoring the booth to the floor. Motor starters and start/stop stations are not included as standard equipment, but are available as options.
12. Caulking, rubber gasket for doors, light fixtures, air seals, fasteners, and all necessary hardware for complete mechanical installation are furnished with all units.