


UniCure

Spraybooths

180 Draft Spraybooth Model UE-180°-CD

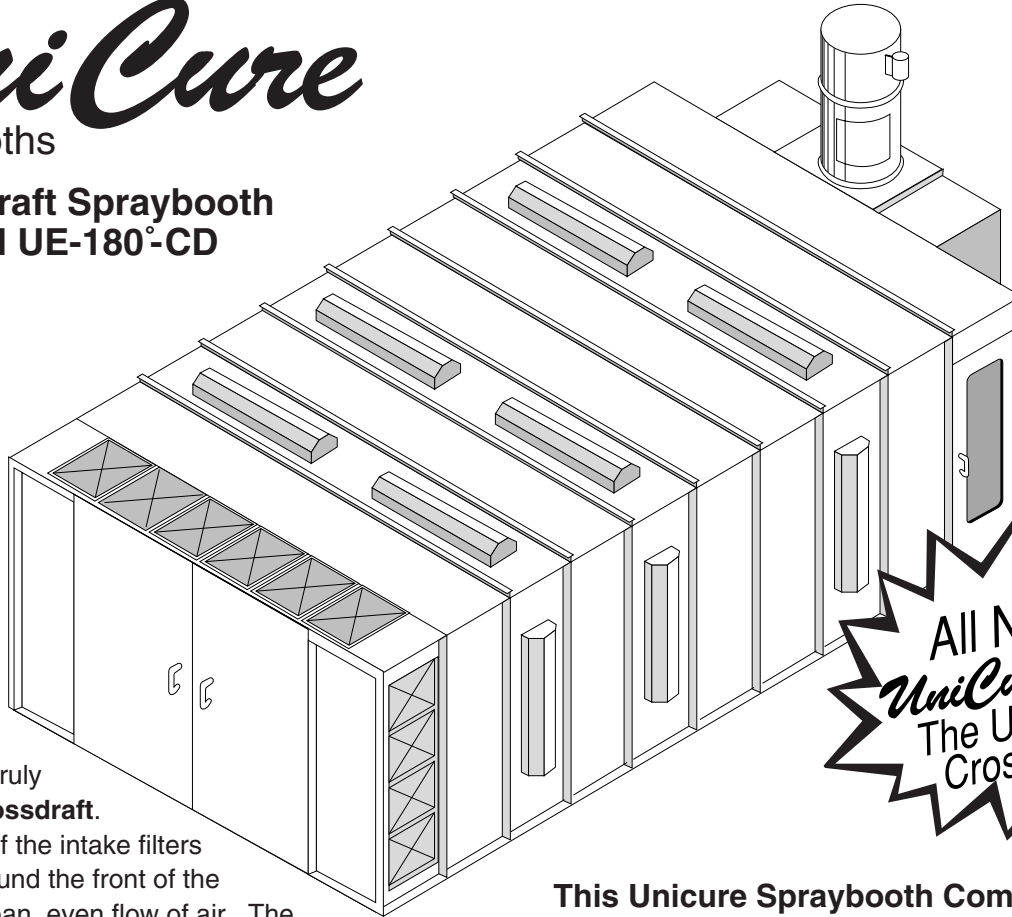


**All New
UniCure 180°
The Ultimate
Crossdraft**

The All New **UniCure 180** is truly the **Ultimate Crossdraft**.

The placement of the intake filters 180 degrees around the front of the booth gives a clean, even flow of air. The air flow is evenly distributed across the top and down each side of the Vehicle. A 30" exhaust fan moves the required amount of air with very low noise level. The air is exhausted in the rear center area, 8 ft. wide and 7 ft. high which puts the finishing touch to the UniCure 180's ultimate air flow.

ETL Models Available

Let us build one to your requirements!

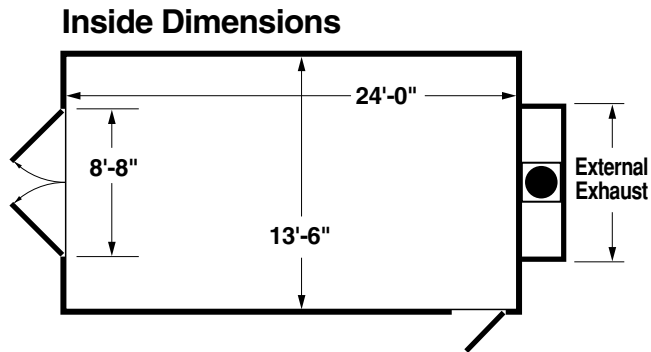

Outside Dimensions

Length27'-6"
Width14'-0"
Height8'-4"

Inside Dimensions

Height8'-0"
Door Height .7'-10"
Door Width . .8'-8"

This Unicure Spraybooth Comes Complete

- All Necessary Galvanized Steel Construction Panels
- All Necessary Fasteners and Sealing Materials
- 2 Solid Product Doors with Hardware
- 1 Personnel Door with Window and Hardware
- 12-48" 4 Tube Fluorescent Light Fixtures
- 1-30" Exhaust Fan with 2 H.P. Motor
- 2 Extra Sections of Exhaust Duct
- 1 Exhaust Duct with Clean Out Door
- 1 Automatic Exhaust Air Ventilator
- All Intake Filters
- All Exhaust Filters

Safety Features

- Air Safety Interlock Valve
- Exhaust Air Safety Switch
- Visual Manometer/Draft Gauge

UniCure
Spraybooths

INTERSTATE MARKETING CORPORATION

104 SPENCE LANE, NASHVILLE, TN 37210

Your Collision Repair Equipment Headquarters

Call Toll Free: 1-800-868-3033 • TN (615) 889-3330

e-mail: unicure@spraybooths.com • www.spraybooths.com

UniCure

180 Draft Spraybooth Model UE-180°-CD

- 1) The spraybooth construction and exhaust air flow velocities are designed to meet or exceed OSHA standards.
- 2) Standard safety equipment includes interlock exhaust air safety switch and a compressed air safety valve for air interlock control.
- 3) This booth is constructed of 18 gauge galvanized sheet steel, with interlocking flange edges that are fastened together with self-tapping speed screws. Panels have exterior flanges to provide a smooth interior surface.
- 4) The doors are built with two inch by two inch square tube frames for heavy duty service, and have a lip air seal. One 36" x 84" personnel access door is standard. The door can be located on either side to meet user requirements.
- 5) Standard exhaust system is furnished with a 30" diameter fan and open type motor.
- 6) Exhaust units and motors supplied are based on the booth installed with a maximum of 25' straight exhaust ducting. When additional ducting or elbows are used, a higher output fan and larger motor might be required. If so, consult your factory representative.
- 7) Dry filter booths are furnished with one set of 20" x 20" x 1" tacky intake filters and one set of 20" x 20" x 2" spun glass exhaust filters. The filters have a Class II listing by Underwriters Laboratories, and are Factory Mutual approved.
- 8) A draft gauge is furnished to indicate when the exhaust filters need changing.
- 9) All light fixtures are 48" fluorescent 4 tube, 110 volt, 40 watt, UL approved with rated clear tempered glass. Optional light fixtures are available to meet Class I, Division II, and Class I, Division I hazardous area requirements. Light tubes are furnished with the fixtures.
- 10) Booths require electrical connections to the fan and light fixtures, and also mechanical duct system connections for air discharge to the outside, and hardware for anchoring the booth to the floor. Motor starters and start/stop stations are not included as standard equipment, but are available as options.
- 11) Caulking, rubber seals for doors, fasteners, and all necessary hardware for complete mechanical installation are furnished with all units.
- 12) Specifications subject to change without notice.