

UniCure

SPRAYBOOTHS

1008 Modified Downdraft



Outside dimensions: 29' 4" x 14' 6" x 11'




Inside dimensions: 28' 10" x 14' x 9'

Solid Build

Excellent Air Flow

Superior Lighting

Easy & Economical to Operate

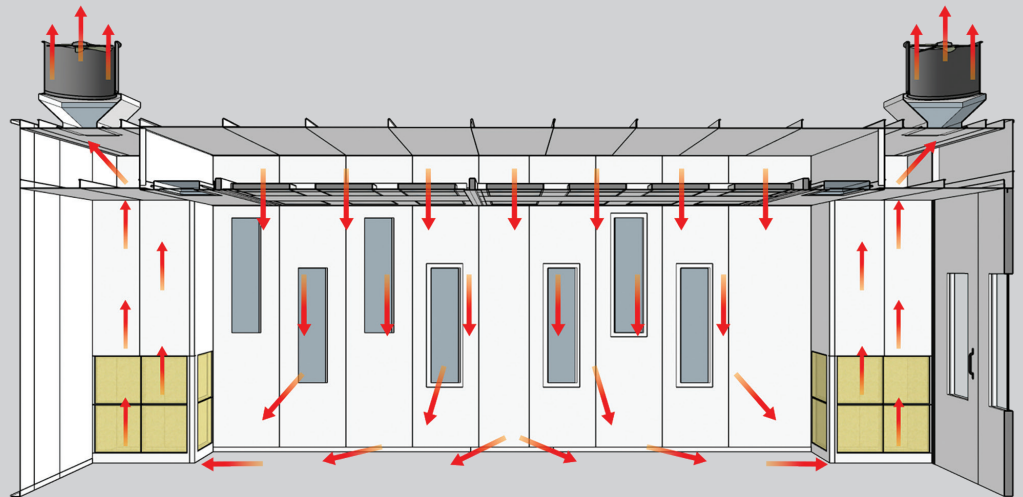

UniCure 1008 Modified Downdraft Comes Complete

- POWDER COAT WHITE
- TEK SCREW CONSTRUCTION
- CROSSOVER PLENUM ON EACH END
- TRI-FOLD PRODUCT DOORS WITH (3) WINDOWS
- (16) 4-TUBE INSIDE ACCESS LIGHT FIXTURES
- (2) 24" EXHAUST FANS W/ 9' DUCT KIT INCLUDING CLEAN OUT & ARV
- HEATED AIR MAKE-UP SYSTEM AT 1.5 MBTU AND 14,000 CFM
- DELUXE CONTROLS
- HEATER DUCT PACKAGE WITH INTAKE & DISCHARGE DUCT



Inside dimensions:
28'10" x 14' x 9'

Outside dimensions:
29'4" x 14' 6" x 11"

Product door opening:
9' 4" W x 8' 10" H

- The spraybooth construction and exhaust air flow velocities are designed to meet or exceed OSHA standards.
- This booth is constructed of 18 gauge galvanized sheet steel powder coated white inside and out, with interlocking flange edges that are fastened together with self tapping speed screws. Panels have exterior flanges to provide a smooth interior surface.
- The doors are built with two inch by two inch square tube frames for heavy duty service, and have a lip air seal. One 36" X 84" personnel access door is standard. The door can be located on either side to meet user requirements.
- Booths require electrical connections to the fan and light fixtures, mechanical duct system connections for air discharge to the outside, and hardware for anchoring the booth to the floor.
- Caulking, rubber seals for doors, fasteners, and all necessary hardware for complete mechanical installation are furnished with all units.
- Specifications subject to change without notice.

AMERICAN MADE
www.spraybooths.com

