


SPRAYBOOTHS

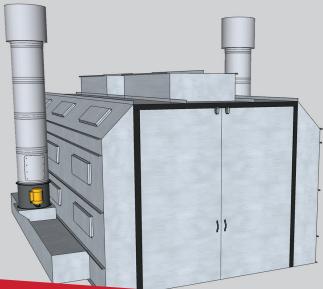

Outside dimensions: 30' 5" x 20' 5" x 14'

Solid Build

Excellent Air Flow


Superior Lighting

Easy & Economical to Operate


UniCure e-SPRAY EV300DSE Comes Complete

- Galvanized
- Nut & Bolt / Tek screw construction
- Solid product doors without windows
- Personnel door with window
- (18) 4-tube T8 light fixtures
- (2) 30" Exhaust fans with 12' duct packages including clean out and ARV
- Heated air make-up system at 1.9 MBTU and 18,000 CFM with Deluxe controls
- Heater duct package with intake and discharge duct

e-SPRAY EV300DSE Downdraft Side Exhaust

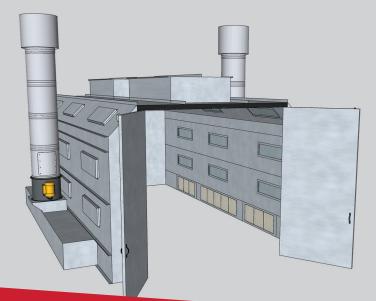

Inside dimensions: 30' x 16' x 12'

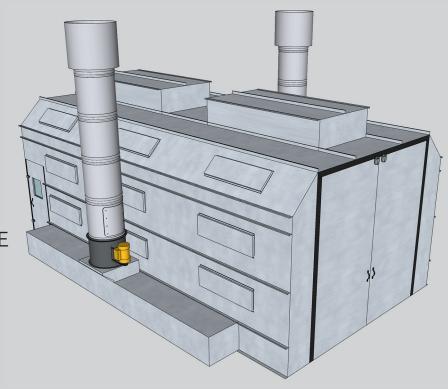





e-SPRAY EV300DSE Downdraft Side Exhaust

Inside dimensions: 30' x 16' x 12' **Outside dimensions:** 30' 5" x 20' 5" x 14' **Product door opening:** 11' 4" W x 11' 8["] H • The spraybooth construction and exhaust air flow velocities are designed to meet or exceed OSHA standards. • This booth is constructed of 18 gauge galvanized sheet steel with interlocking flange edges that are fastened together with self tapping speed screws. Panels 30'-0" have exterior flanges to provide a smooth interior surface. • The doors are built with two inch by two inch square tube frames for heavy duty service, and have a lip air seal. One 36" X 84" personnel access door is standard. The door can be located on either side to meet user requirements. 16'-0" • Booths require electrical connections to the fan and light fixtures, mechanical duct system connections for air discharge to the outside, and hardware for anchoring the booth to the floor. • Caulking, rubber seals for doors, fasteners, and all necessary hardware 11' - 4''for complete mechanical installation are furnished with all units. Specifications subject to change without notice.

AMERICAN MADE www.spraybooths.com